

PRODUCT LINE:

Accessories

CATEGORY:

Audio

ADP-2981 Speaker with Strobe

ADP-2982: Speaker without Strobe



ADP-2982

FEATURES

- Power for the FOI-2982 is supplied by both the ADP-2981 and the ADP-2982.


DESCRIPTION

The ADP-2981 and ADP-2982 are wall mounted loudspeakers. The only difference between the two speakers is that the ADP-2981 has a strobe light annunciator. Both speakers have a port into which an FOI-2982 fiber optic isolator is inserted. Signals received by the FOI-2982 will drive an internal 8 watt amplifier to deliver sound on the 8 inch loudspeaker. Input and output jacks are also provided for cascading up to ten speakers for audio distribution as shown under "[TYPICAL APPLICATION](#)".


ADP-2981 AND ADP-2982



SPECIFICATIONS	
Power Requirement	120/240 VAC, 50/60 Hz
Input Connector	RCA Type Phono Jack
Input Impedance	50 kΩ
Output Connector	RCA Type Phono Jack
Output Impedance	600 Ω
Output Signal Level	100 mV
Case Dimensions	11-1/2" Wide x 11-1/8" High x 4-1/16" Deep

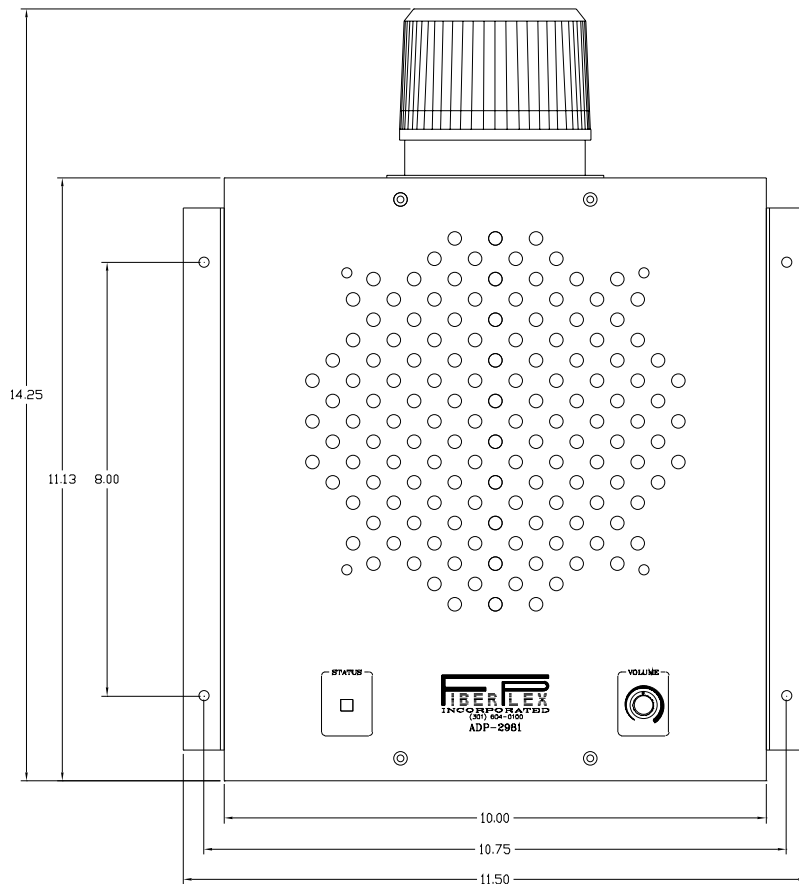

ADP-2981 Front View

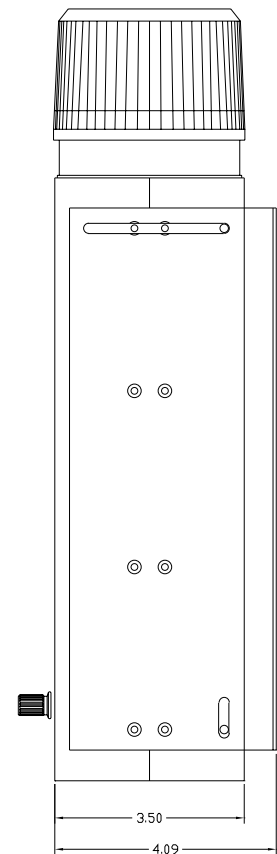


ADP-2981 Side View

ADP-2981 AND ADP-2982



TYPICAL APPLICATION

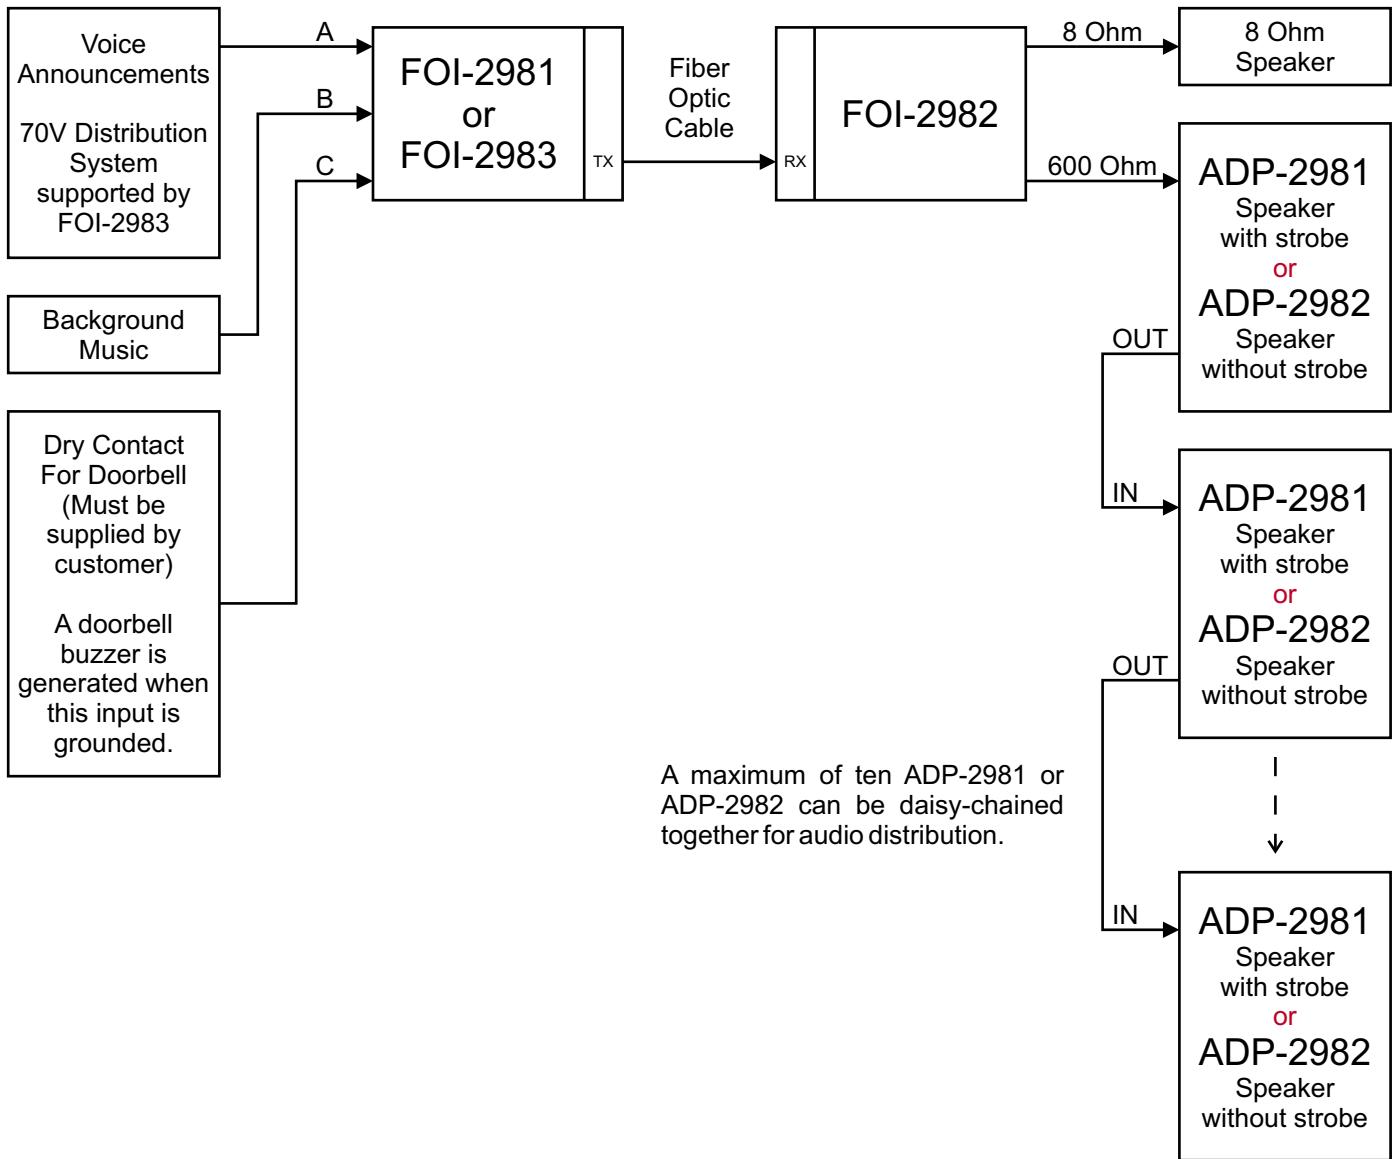

A maximum of ten ADP-2981 or ADP-2982 can be daisy-chained together for audio distribution.